

Ametalin Non-combustible ThermalBreak® Strip

Product Code: NCTBS-RL-451200

R0.2 Non-combustible ThermalBreak® Strip

For use in all commercial and residential Non-combustible constructions where R0.2 thermal breaks are required.



Ametalin Non-combustible ThermalBreak® Strip is an innovative insulating fibre specifically designed to create a non-combustible R0.2 thermal break between steel framing and various cladding materials and roofing sheets in non-combustible constructions.

Ametalin Non-combustible ThermalBreak® Strip is ideal for use with sarking, wall wraps, and vapour permeable membranes in fire-rated steel-framed commercial and multi-storey residential constructions where R0.2 thermal break, energy efficiency, condensation control and the maximum fire resistance is crucial.


With a result of *Not Deemed Combustible* when tested to AS 1530.1, Ametalin Non-combustible ThermalBreak® Strips are suitable for use in all non-combustible constructions according to NCC Volume One, C2D10 and NCC Volume 2, Part H3D2.

Features and Benefits

- > Not deemed combustible to AS 1530.1
- > Ideal for commercial continuous facades in Type A and B, Non-combustible constructions, and in all steel frames where R0.2 thermal break is required
- > Chemically stable and compression-resistant
- > Easily cuts to any desired length or shape
- > Self-adhesive backing for fast, easy installation
- > Enhances the energy efficiency and breathability of the system
- > Termite, mould, and mildew resistant
- > Suitable for use in all fire rated boundary wall systems
- > Perfect for NCC 2022 vapour permeable roofs in all BALs

Construction

Ametalin Non-combustible ThermalBreak® Strip is made with a premium grade non-combustible, high-temperature resistant insulation felt with a high-grade self-adhesive backing.

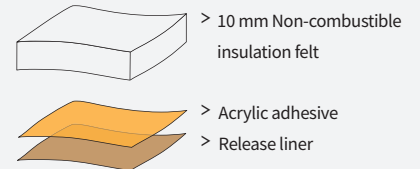

Dimensions

45 mm x 1200 mm
Nominal thickness: 10 mm

Ametalin Non-combustible ThermalBreak® Strips are available in alternative widths and lengths, upon request. Special pricing and minimum order quantities apply.

Handling and Storage

Store this product in a clean, dry place out of direct sunlight.

Material Properties and Classifications

Ametalin Non-combustible ThermalBreak® Strip classifications in accordance with AS 1530.1:1994 and AS/NZS 4859.1:2018.

Criteria	Reference	Result	Requirement
Combustibility	AS 1530.1-1994	Not deemed combustible	Non-combustible
Nominal Thickness		10 mm	Value
Thermal Conductivity	ASTM C518	0.05 W/m·K	Value
Material R-value _{50/90} (m ² ·K/W) at 23°C	AS/NZS 4859:2018	R 0.2	Value
Compression Rate		> 300 kPa	
Maximum Temperature		1300°C	
Density		288 kg/m ³	
Adhesive		Acrylic Pressure Sensitive	

NCC Compliant

Ametalin Non-combustible ThermalBreak® Strip is tested to AS 1530.1:1994 and AS/NZS 4859.1 therefore meets all of the requirements of the *National Construction Code* of Australia for **Not Deemed Combustible** thermal break construction materials.

Bushfire Attack Levels (BALs)

Complies with AS 3959-2018 *Construction of buildings in bushfire-prone areas* for use in residential and commercial building systems up to and including BAL-FZ.

Specification Notes

When specifying state the following:

Product Name: Ametalin Non-combustible ThermalBreak® Strip

The thermal break to be installed shall be Ametalin Non-combustible ThermalBreak® Strip, classified as *not deemed combustible* when tested to AS 1530.1, with a material R-Value of R0.2.

Complete details are available on our website: www.ametalin.com

Installation

Ametalin Non-combustible ThermalBreak® Strip is typically installed to the exterior side of the structural framing building envelope after the installation of the pliable building membrane. It is recommended to install Ametalin Non-combustible ThermalBreak® Strips at the same time as the outer cladding; this will ensure optimal durability and performance is achieved.

1. The chosen building membrane is installed to the roof or wall steel frame construction in accordance with the NCC 2022 and AS 4200.2:2017.
2. Locate the structural members to which the Ametalin Non-combustible ThermalBreak® Strip is to be applied. eg: studs, plates, rafters, purlins etc
3. Ensure that the surfaces to be adhered to are clean, dry and free from dirt, grease, oil and other contaminants.
4. Peel back the release liner
5. Centre the Ametalin Non-combustible ThermalBreak® Strip parallel to the underlying steel framing member.
6. Apply the strip, ensuring maximum surface contact is achieved by applying firm pressure by hand or roller applicator.
7. Install cladding or roofing materials without delay.

For non-adhesive backed Ametalin Non-combustible ThermalBreak® Strip, mechanically fix to steel framing member with flat head screws or short pieces of tape before applying cladding or roofing materials. These fixings can then be removed as you apply the cladding if preferred.

Performance insulation for a greener world

9-11 Playford Crescent Salisbury North SA 5108

T: +61 8 8285 6955 F: +61 8 8285 5911

E: info@ametalin.com W: ametalin.com



Ametalin

Australian designed for Australian conditions. Ametalin 9-11 Playford Crescent, Salisbury North SA 5108 T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@ametalin.com

© 2025 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended purpose. Product colour may vary from batch to batch. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. Manufactured in China. APM-45939-0